


## DALI Touch Control Panels

Model No.EDT1 DIM



EDT2 CT



EDT3 RGB



EDT4 RGBW



### ◆ Features

- Adopt DALI standard protocol IEC62386-102,207,209.
- Support switch, dimming and color adjustment function; zone control is available.
- DALI bus supply power.
- Easy to set addresses.
- Support scene, group, unicast and broadcast mode.
- Touch vibration

DALI Power Supply

Control Modes:

- EDT1 DIM
- EDT2 CT
- EDT3 RGB
- EDT4 RGBW


Working Temperature: -30°C ~ +55°C

Dimensions (L×W×H): 86 × 86 × 37mm

Package Size (L×W×H): 113 × 112 × 50mm

Weight (G.W.): 240g

### ◆ Dimension(unit:mm)

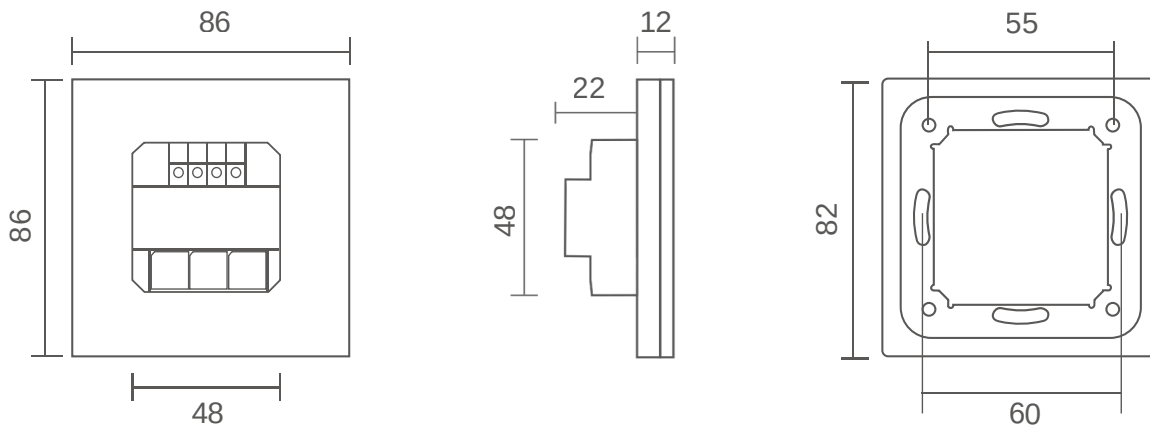

## WiFi Controllers

Picture&Model name Model No.BWCE-W	Model Description	Function	Product Description
 <p>Model No.BWCE-W</p>	<p>WiFi Dual-Mode Single Color Controller</p>	<p>High-quality WIFI Smart Controller Timer switch, delay switch, remote control function Mobile APP control, one-to-many control, group control available Single-color Dimming Simultaneously support Amazon Alexa &amp; Google home voice control</p>	<p>DALI powerSoftware: Magic Home Pro Input Voltage: DC(12-24)V Mobile Version Requirement: iOS 9.0 / Android 4.0 or above Max Output Power: 96W Max Output Current: 4A/CH Application Range: Low Voltage LED Products Channel: Single Color Material: Fire-resistant ABS Effective Control Distance: Visual Distance 30m Operating Temperature: -20~55°C Connection Method: DC Connector Warranty Period: 12 Months</p>
 <p>Model No.MWIR-RGB</p>	<p>Wireless 24-Key A1 Model WiFi Dual-Mode RGB Controller E Model Single Load</p>	<p>High-quality WiFi Smart Controller Timer, Delay &amp; Remote Control Functions Mobile APP Control, One-to-Many &amp; Group Control Available 16 Million Colors Adjustment, 20 Built-in Dynamic Modes DIY Color Selection, Microphone &amp; Music Mode Functions Scene Color Picking, Speed &amp; Brightness Adjustment Supports Amazon Alexa &amp; Google Home Voice Control Cinema Mode for Enhanced Viewing Experience WiFi + BLE Dual-Mode Chip, Low Power Consumption &amp; Excellent</p>	<p>App: Magic Home Pro Input Voltage: DC(12-24)V Mobile Version Requirement: iOS 9.0 / Android 4.0 or above Max Output Power: 100W Max Output Current: 4A/CH Application Range: Low Voltage LED Products Channel: RGB Material: Fire-resistant ABS Effective Control Distance: 30m (Visual Distance) Operating Temperature: -20~55°C Wiring Method: Pin Header Warranty Period: 12 Months</p>
 <p>Model No.WCKS-RGB</p>	<p>Mini WiFi RGB + 44-Key IR Remote Controller</p>	<p>High-quality WIFI Smart Controller Timer switch, delay switch, remote control function Mobile APP control, one-to-many control, group control available 16 million colors adjustment, 20 built-in dynamic modes DIY color selection, microphone function, music mode function Scene color picking function, speed and brightness adjustment function Support Amazon Alexa and Google home voice control Cinema mode for enhanced viewing experience</p>	<p>App: Magic Home Pro Input Voltage: DC(5-28)V Mobile Version Requirement: iOS 9.0 / Android 4.0 or above Max Output Power: 100W Max Output Current: 4A/CH Application Range: Low Voltage LED Products Channel: RGB Material: Fire-resistant ABS Effective Control Distance: 30m (Visual Distance) Operating Temperature: -20~55°C Wiring Method: Pin Header Warranty Period: 12 Months</p>
	<p>WiFi RGB Controller Model K, Sound Control Version (44-Key IR Remote) (12-24V) (Single Load)</p>	<p>High-quality WIFI Smart Controller Timer switch, delay switch, remote control function Mobile APP control, one-to-many control, group control available 16 million colors adjustment, 20 built-in dynamic modes DIY color selection, microphone function, music mode function Scene color picking function, speed and brightness adjustment function Support Amazon Alexa and Google home voice control Cinema mode for enhanced viewing experience</p>	<p>App: Magic Home Pro Input Voltage: DC(5-28)V Mobile Version Requirement: iOS 9.0 / Android 4.0 or above Max Output Power: 100W Max Output Current: 4A/CH Application Range: Low Voltage LED Products Channel: RGB Material: Fire-resistant ABS Effective Control Distance: 30m (Visual Distance) Operating Temperature: -20~55°C Wiring Method: Pin Header Warranty Period: 12 Months</p>